GARLAND®

A WELBILT Company

40 SERIES GAS/HEAVY DUTY


Model 40-6S EVEN HEAT HOT TOP ATTACHMENT on storage base with doc

Model 40-6T MODULAR EVEN HEAT HOT TOP ATTACHMENT

Gas Type

Natural

Propane

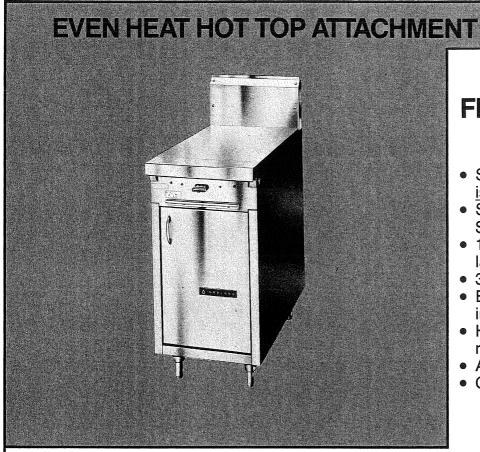

FEATURES

- Stainless steel front is standard.
- Storage Base model includes S.S. door.
- 1 year limited parts and labor warranty is standard.
- 30,000 BTU "H" type burner.
- Extra heavy EVEN HEAT cast iron top.
- Heavy gauge aluminized steel radiation baffle system.
- Automatic burner ignition.
- Chromed steel legs standard.

Model 40-6S Shown with optional 10" low profile backguard.

COOKING TOP

The Even Heat Hot Top is designed to provide extra cooking surface when a full range is not needed or space is limited. A 17" wide × 27" deep cooking top is designed with extra heavy cast iron smooth surface. A 30,000 BTU "H" type burner heats evenly. Heavy gauge aluminized steel radiation baffle assembly requires no fire brick and increases thermal efficiency in transferring heat to the cooking surface. Aluminized steel under total cooking surface resists structural deterioration due to spillage, food acids, and heat intensity.

STORAGE BASE

For maximum space utilization, the cooking surface is available with a high quality Garland storage cabinet.

Like the modular top, the storage base unit is designed to connect and match with all Heavy Duty 40 Series equipment.

A solidly-constructed, complete cabinet—17" wide by 35" deep, attractively designed with stainless steel full-sized hinged door and metal floor, provides a convenient, concealed, and sanitary area for pots, pans, and other cooking items.

Double deck high shelves, single deck high shelves, and backguards are available and recommended for use with range attachments.

OPTIONS and ACCESSORIES

Stainless Steel left side
S.S. right side
S.S. both sides
S.S. back
Double Deck S.S. Hi-Shelf
Single Deck S.S. Hi-Shelf
10" S.S. Low Profile
Backguard
17" S.S. Backguard
Modular Stand
Toe Base (S Model only)


EVEN HEAT HOT TOP ATTACHMENT


GAS/HEAVY DUTY

1/4" Scale

40 SERIES

17" Wide × 35" Deep



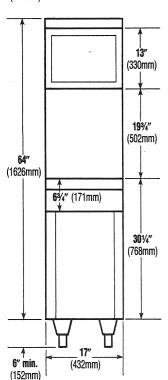

DIMENSIONS & SPECIFICATIONS

 ATTACHMENT
 40-6S
 40-6T

 Width
 17"
 17"

 Depth
 35"
 35"

Height w/NSF legs 36¼" 36¼" WITH STAND Height less NSF legs 30¼" 30¼" WITH STAND

*Modular top has 11/2" seating flanges

NATURAL GAS RATED INPUT, BTU/HR

Top Section

30,000

30,000

(Manifold size on all units: 11/4" N.P.T.)

INSTALLATION NOTES

Combustible Wall

<u>Clearance</u> For reduced clearances, Sides 14" (356mm) Back 6" (152mm)

refer to ANSI Z223

1/NFPA #54

Entry Clearance

Crated 221/4" (565mm)

Uncrated 171/4" (438mm)

When ordering, specify type of gas to be used.


Commercial cooking equipment requires an adequate ventilation system. For additional information, refer to the National Fire Protection Association's Standard No. 96, "Vapor Removal from Cooking Equipment."

IMPORTANT: FOR OPTIMUM PERFORMANCE OPERATING GAS PRESSURE NATURAL 6" W.C. PROPANE 10" W.C.

LEGEND

S = Modular Attachment on Storage Base

T = Modular Attachment (No Base)

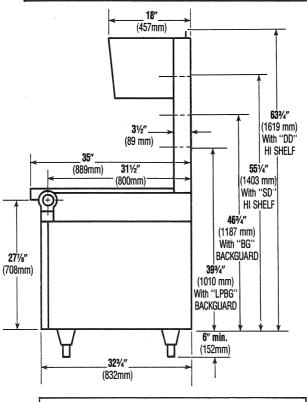

SHIPPING WEIGHT

Model 40-6S 235 lbs. Model 40-6T 165 lbs.





CONSTRUCTION & FINISH

Channel formed base and front frame of heavy gauge welded steel. Stainless steel front is standard. Heavy gauge front rail designed to protect "ON-OFF" valves. Nickel-chrome plated adjustable N.S.F. approved legs standard.

Continuous product improvement is a Garland policy, therefore specifications and design are subject to change without notice.



Garland Commercial Industries, Inc. Freeland, Pennsylvania 18224

Phone (717) 636-1000 Telex 887610