


Item #: _____

GARLAND

Model # **UCO-G-10/UCO-G-20**

Product Name: **Ultimate Convection Oven,
Full Size, Gas**

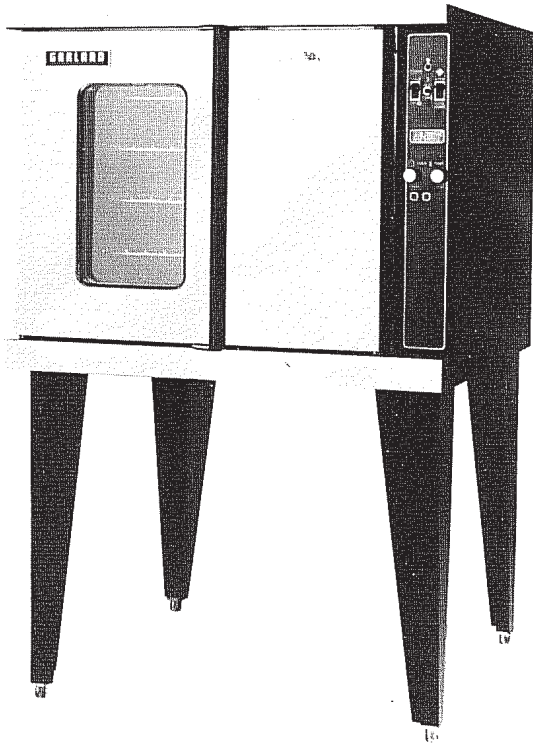

Model # **UCO-G-10**



SPECIFICATIONS

GENERAL

Designed as a general purpose oven for baking, roasting and rethermalizing a variety of food products, faster and at lower temperatures by circulating heated air throughout an oversized oven cavity.

STANDARD FEATURES

- Electronic controls which include:
 - Cook temperature control with a range of 140°F (60°C) to 500°F (260°C)
 - Cook Count Down Timer — Max 12 hrs.
 - Timer/Temperature Digital Display

STANDARD FEATURES (CONTINUED)

- Electronic Ignition
- Forced Air Combustion Burner — 40,000 BTU Input per Cavity
- Single Speed Fan with 1/3 HP Motor
- Porcelain Enameled Oven Cavity w/Coved Corners
- Stainless Steel Front, Black Powder Coat Epoxy Sides, Tops, Back and Legs
- 60/40 Dependent Door Design w/Double Pane Thermal Window in Left Door
- Positive Latching, Full Height Door Handle
- Interior Lighting
- Five (5) Oven Racks w/10 Position Rack Guide
- One Year Limited Parts and Labor Warranty
- Service Accessibility From Front

OPTIONAL FEATURES (Additional Charge)

- Two Speed Fan with 1/3 HP Motor
- Stainless Steel Exterior — Legs, Sides, Top, Back
- Continuous Clean Oven Interior
- Stainless Steel Oven Interior
- Cabinet Base with Shelf and Rack Guides
- Open Base with Shelf and Rack Guides
- Solid Doors — Less Window and Lights
- Double Pane Thermal Window in Right Side
- Swivel Casters w/ Front Brakes (set of 4)
- Additional Oven Racks

OPTIONAL CONTROLS (Additional Charge)

- Fan Delay
- Six (6) Set Points Programmable Memory
- Cook 'N Hold
- Rack Timer
- Tiered Timer
- Tiered Timer w/Steam Injection
- Integrated Timer
- Integrated Timer w/Steam Injection

WELBILT

Garland Commercial Industries, Inc., 185 East South St., Freeland, PA 18224


Item #: _____

Model # UCO-G-10/UCO-G-20

Product Name: Ultimate Convection Oven, Full Size, Gas

GARLAND

DIMENSIONS & SPECIFICATIONS

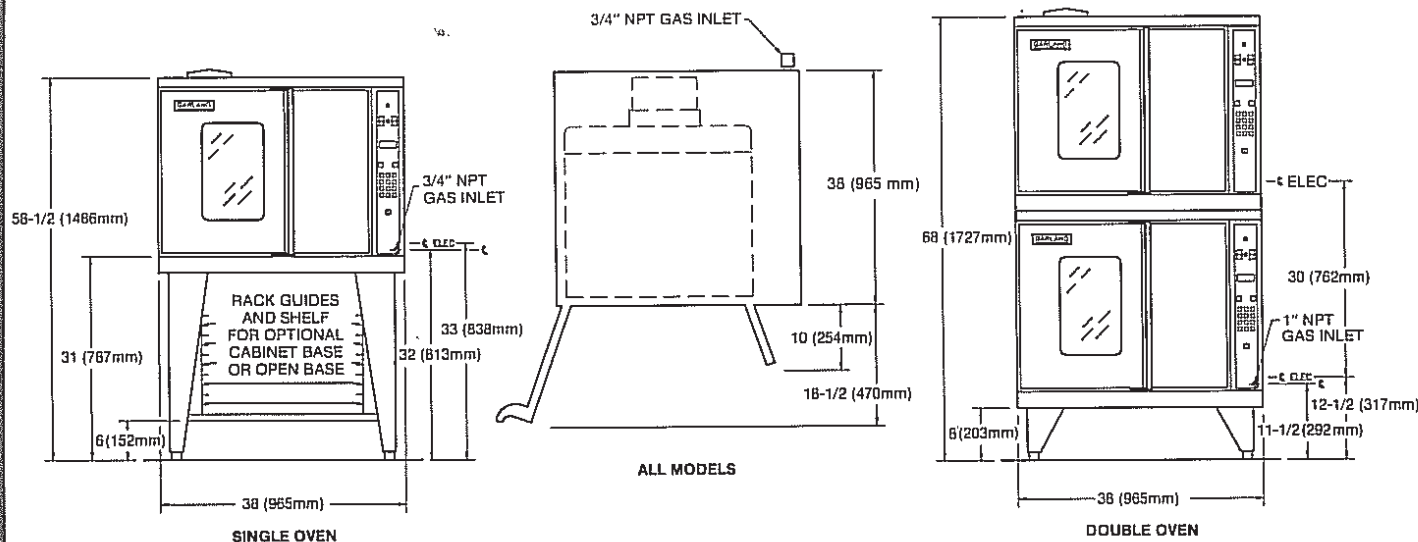

Model No.	Interior Dimensions (per deck)			Exterior Dimensions			Ship Wt.
	W	H	D	W	H (w/legs)	D	Lbs/Kg
UCO-G-10	29" (711mm)	24" (588mm)	24" (588mm)	38" (965mm)	58½" (1486mm)	38" (965mm)	715 (324 Kg)
UCO-G-20	29" (711mm)	24" (588mm)	24" (588mm)	38" (965mm)	68" (1727mm)	38" (965mm)	1430 (649 Kg)

Model No.	Input Chart — Nat Gas		Elec Characteristics	
	BTU/HR	Gas Inlet	120V/1 Phase	Motor
UCO-G-10	40,000	One @ 3/4" NPT	One @ 6.2 Amps	1/3 HP
UCO-G-20	80,000	One @ 1" NPT	Two @ 6.2 Amps	1/3 HP

Standard Electrical Specifications Include Motor Requirements

Installation Notes

Combustible Wall Clearances

- Side: 3" (76mm)
- Back: 3" (76mm)
- Base: 0

Entry Clearance

- | | |
|---------------|-----------------|
| Crated | Uncrated |
| 42" (1067mm) | 39" (991mm) |

Gas Input Ratings shown here are for installations up to 2000 ft. (610m) above sea level. BTU input ratings must be deflated for high altitude installations.

Manifold Pressure

- | | |
|-----|---------|
| Nat | 4.5 WC |
| LP | 10.0 WC |

Specify Gas Type When Ordering

Continuous product improvement is a Garland policy.
Therefore, specifications and designs are subject to change without notice.