


1. TURN OFF ALL POWER.
2. LET OVEN COOL DOWN IF NECESSARY.
3. REMOVE THE OVEN RACKS AND AIR BAFFLE.
4. ADD NEW SPACERS AS SHOWN BELOW.
5. REPLACE BAFFLE AND OVEN RACKS.

REMOVE (2) ACORN NUTS AND SCREWS
FROM TOP AND BOTTOM OF BAFFLE

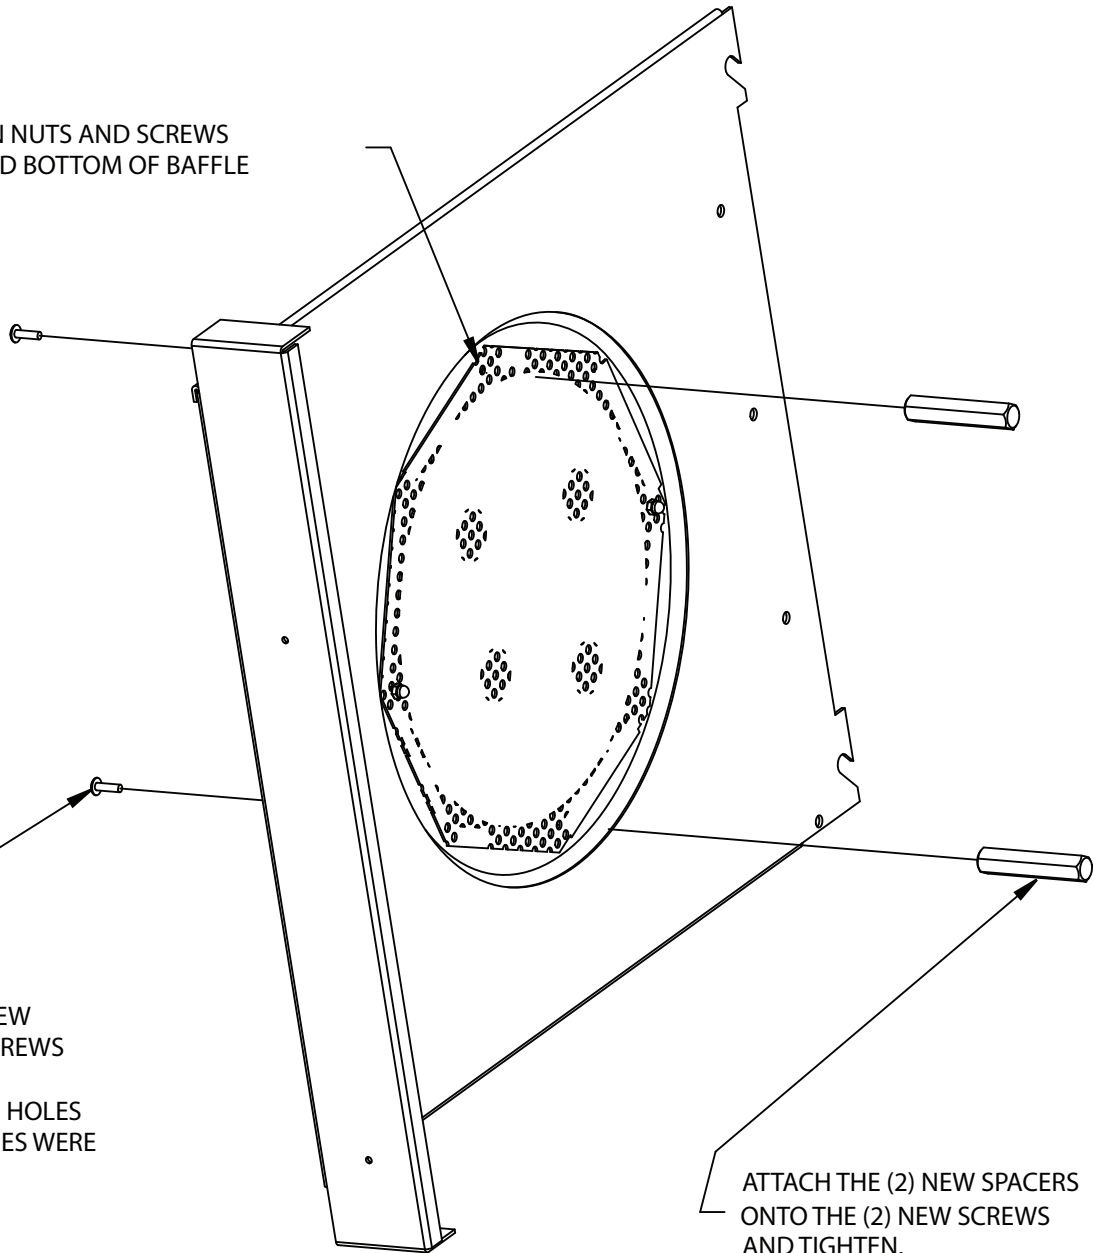

INSERT (2) NEW
MACHINE SCREWS
10-24 X 5/8
IN THE SAME HOLES
THE OLD ONES WERE
REMOVED

ATTACH THE (2) NEW SPACERS
ONTO THE (2) NEW SCREWS
AND TIGHTEN.