



# Four Compartment Electric Deck Oven

Item: AP4  
 Quantity: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_

Models:

AP4

## AIR PAC



Model #AP4

### Standard Features:

- Stainless steel front, sides, top, and legs
- Four Heavy-duty pull-down front doors
- Removable bottom jet plate
- Adjustable steel wire oven rack (2 positions) one per-deck
- Electronic controls with precision timers
- Single speed fan with ¼ HP motor (0.5 kW)
- 4.7 kW element package per deck
- Leveling and front-locking casters
- 1 year limited parts & labor warranty on ovens

### Optional Features:

- Extra Stainless Steel wire rack (s)
- Perforated stainless steel pizza deck, adjustable (two positions)

Note: Ovens supplied with casters must be installed with an approved restraining device.

Four Compartment Electric Deck Oven

### Specification:

Four individually controlled all-purpose deck ovens in a compact stack design. Each oven utilizes a unique energy delivery system of controlled hot air flow for fast, consistent operation. Offers minimum preheat time, consistent selected temperatures, high quality production and menu versatility. Available in 208 or 240 volt - 3 Phase, 60 Hz only.



Garland Commercial Industries, LLC  
 185 East South Street  
 Freeland, PA 18224  
 Phone: (570) 636-1000  
 Fax: (570) 636-3903

Garland Commercial Ranges Ltd  
 1177 Kamato Road,  
 Mississauga, Ontario  
 L4W 1X4 CANADA  
 Phone: 905-624-0260  
 Fax: 905-624-5669

Enodis UK LTD  
 Swallowfield Way,  
 Hayes, Middlesex  
 UB3 1DQ ENGLAND  
 Telephone: 081-561-0433  
 Fax: 081-848-0041



Oven Interior Dimensions*			Exterior Dimensions			Cu Ft	Shipping Wt. Lbs./Kg	
Width	Height	Depth	Width	Height	Depth		Crated	Uncrated
19-1/4" (489mm)	4-3/4" (121mm)	17-3/4" (451mm)	36-1/2" (927mm)	64-3/4" to 66" (1145mm) to (1676mm)	34-1/4" (870mm)	65	800/363	650/295

\*With rack or pizza deck in place Two fixed rack positions: 1-1/8" (28mm) and 1-5/8" (41mm)


Installation Notes					
Combustible Wall Clearance			Entry Clearance		
Left	Right	Rear	Crated	Uncrated	
0" (0mm)	6" (152mm)	6" (152mm)	44" (1118mm)	35" (889mm)	

Electrical Requirements	kW Loading 208V/240V	Three Phase Nominal Amps Per Line					
		208V			240V		
		L1	L2	L3	L1	L2	L3
<b>Two Circuits Per Two Decks</b>	20.8 Total 10.4 (per 2 Decks)	34	19.6	34	29.4	17	29.4
<b>** Canada - 1 Circuit Only</b>	20.8 Total (per 4 Decks)	68	39.2	68	58.8	34	58.8

\*\* - Per CEC Part 1 2006, 26-744

208 VAC = 197 VAC to 219 VAC 240 VAC = 220 VAC to 252 VAC  
(60 Hz only)

## AIR PAC

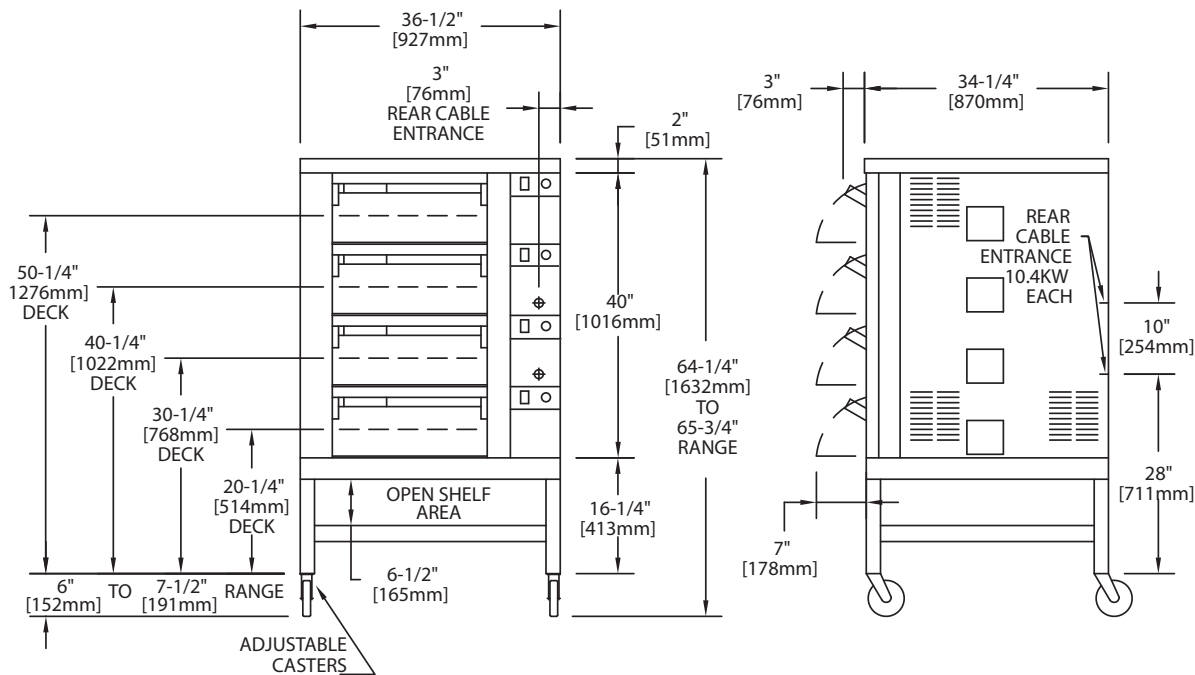

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Form# AP4 (04/28/08)