

Models:

☐ MCO-E-5

Master Half-Size Electric Convection Oven

MCO-E-25

Item:
Quantity:
Project:
Approval:
Date:

GARLAND	
	MASTER 509

Model MCO-E-5

NOTE: Ovens suppled with casters must be installed with an approved restraining device.

Standard Features:

- Master 200 Solid State Control with 150° (66°C) to 500°F (260°C) temperature range
- 2-speed fan control (high & low) and 1/4 HP fan motor
- 208 or 240 volt, single or three phase (please specify)
- Total of 5.6 kW elements per oven cavity
- Stainless steel front, sides, and top
- Single door with double pane thermal window
- 6" (152mm) stainless steel legs
- Porcelain enameled oven interior with coved corners
- 5 chrome plated oven racks on 9-position rack guides
- Double deck models available
 Suffix 25
- 1 year limited parts & labor warranty (USA & Canada only)
- 5 year limited door warranty, excluding window (USA & Canada only)

Optional Features:

- Master 450 Electronic Control with Cook-N-Hold
- 7.5 kW elements
- Extra oven racks
- Stainless steel main back
- Solid stainless steel door, (no charge)
- Stainless Steel open base (34-1/2" (876mm) high) with rack guides, shelf, and square tubular legs for extra rack/pan storage
- Stainless Steel open base (34-1/2" (876mm) high) with rack guides, shelf, and casters - for extra rack/pan storage
- 14" (356mm) NSF-approved stainless steel legs, (for double-deck applications only)
- Deck fasteners (SS flanged feet)
- Cord and plug set
- 50 cycle components & export voltage
- Swivel casters w/front brakes, (for double-deck applications only)

Specifications:

Garland Master Half-Size electric convection oven. 5.6 kW/cavity, 1/4 HP fan motor with two-speed control. Porcelain enameled oven interior with coved corners, 5 oven racks and 9-position rack guides, measures 15-1/2" (470mm)W x 20" (508mm)H x 21-1/8" (536mm)D. Stainless steel front, top, and sides. UL, CUL and NSF Listed.













Model #	Interio	r Dimensions (pe	Ship Wt.	Ship	
Wodel #	W H		D	Lbs/Kg	Cu Ft
MCO-E-5	15-1/2" (393mm)	20" (510mm)	21" (525mm)	290/130	38.5
MCO-E-25	15-1/2" (393mm)	20" (510mm)	21" (525mm)	580/260	77

		Nominal Amperes Per Line							
Package	Total kW	208V/1Ph	240V/1Ph	208V/3Ph			240V/3Ph		
				Х	Υ	Z	Х	Υ	Z
Standard	5.6	26	22	23	12	14	20	12	14
Option	7.5	37	32	22	21	22	20	18	19

Electrical specifications include motor requirements.


Other voltage options available upon request:


220/

240/

NOT spec

0/380 4-wire 50Hz		Combustible Wall Clearances				
0/415 4-wire 50Hz	Sides	des 2" (51mm) Back 0" (0" (0mm)		
TE: Double decks require 2 power supplies please	Entry Clearance					
cify electrical characteristics when ordering.	Crated Uncrated			Incrated		
30"	37" (940mm)		31" (787mm)			
[762 mm] 2-3/4" [70 mm]						

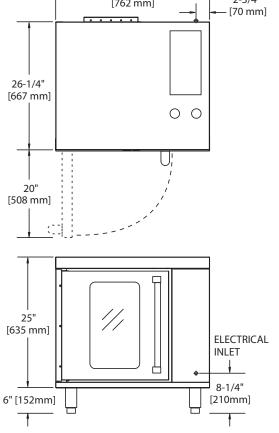

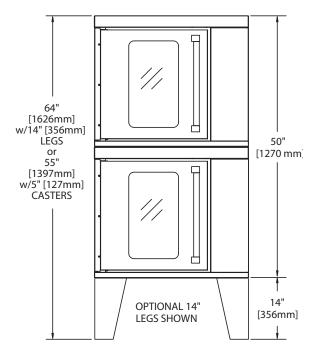

Installation Notes:

Form# MCO-E-5/25 (02/29/08)





