



E2000 Series Deck Ovens

Item: _____
 Quantity: _____
 Project: _____
 Approval: _____
 Date: _____

E2000 Series Deck Ovens

Models:

- E2001 E2111 E2055 E2015 E2155
 E2011 E2005 E2555 E2115



Model E2001



Model E2005

Standard Features:

- Stainless steel exterior - front, sides, and legs
- Aluminized top and back panels
- Heat produced by tubular elements above and below the hearth
- Flexibility of top/bottom heat ensured by 3-heat operating switches
- Temperature range 200 ° F (93° C) to 550° F (288° C)
- An 1-hour mechanical timer is standard on Bake and Roast Ovens.
- Balanced oven door opens full width, level with deck
- Front-serviceable controls outside the heat zone
- Window and Interior Lights standard on Bake Ovens

- Bake Oven: 3/4" (19mm) hearthite deck with 8" (203mm) interior height
- Roast Oven: 12 gauge steel hearth deck with 12" (305mm) interior height
- Roast Oven: removable intermediate shelf
- Bake/Roast combination models available up to 3 high stacked


Optional Features:

- Stainless steel Top
 Stainless steel Main Back
 Window and Interior Lights in Roast Oven
 Steel hearth deck for bake ovens
 3/4" hearthite deck for roast ovens

Specification:



Ovens are of the sectional type with each section operating independently. Construction shall be of stainless steel front, sides, and legs. Bake section has 8" (203mm) interior height with 3/4" (19mm) core plate hearth. Roast section has 12" (305mm) interior height with 1/8" (3mm) thick cold rolled steel hearth. Both roast and bake ovens interiors are 39" (990mm) wide X 28 1/4" (717mm) deep. An one-hour timer is standard on all decks. Top and bottom tubular elements are 3 - heat switch controlled with heavy-duty operating thermostat with a range of 200 ° F (93° C) to 550° F (288° C).





Model	Total KW Loading	Nominal Amperes Per Phase								Shipping	
		3 Phase						Single Phase		Cu.Ft.	Weight lbs/kg
		240V			208 V			240V	208V		
240 & 208	X	Y	Z	X	Y	Z	240V	208V			
E2001	6.2kW	11	15	23	12.5	17.3	26	26	30	44	550/249
E2011	12.4 kW	32	26	32	37	30	37	52	60	84	970/440
E2111	18.6kW	45	45	45	51.5	51.5	51.5	77.5	90	128	1410/640
E2005	6.2kW	11	15	23	12.5	17.3	26	26	30	52	660/299
E2055	12.4kW	32	26	32	37	30	37	52	60	102	1260/572
E2555	18.6kW	45	45	45	51.5	51.5	51.5	77.5	90	154	1890/857
E2015	12.4 kW	32	26	32	37	30	37	53	60	96	1120/506
E2115	18.6kW	45	45	45	51.5	51.5	51.5	77.5	90	136	1550/703
E2155	18.6 kW	45	45	45	51.5	51.5	51.5	77.5	90	146	1670/750

Standard wiring 240 V or 208 V (197/219) Single or Three Phase – Specify which is required

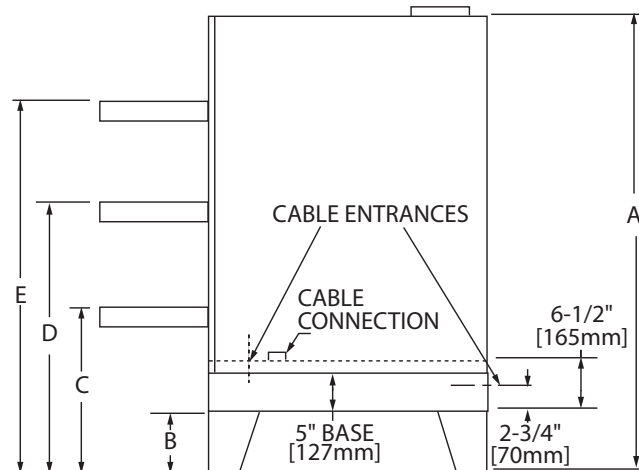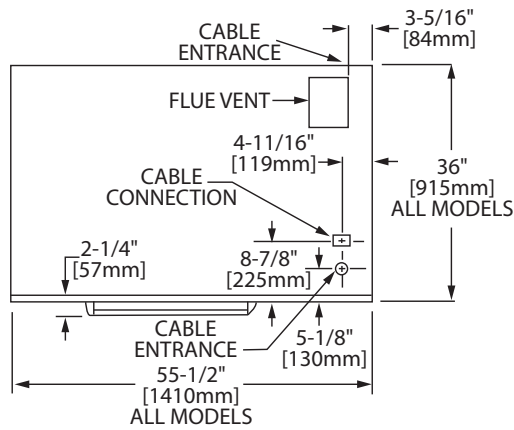

Model	A	B	C	D	E	Width	Depth
E2001	51" (1295mm)	27" (686mm)	36.5" (927mm)			55.5" (1410mm)	36" (914mm)
E2011	66" (1676mm)	23" (584mm)	32.5" (826mm)	51.5" (1308mm)		55.5" (1410mm)	36" (914mm)
E2111	66" (1676mm)	4" (102mm)	13.5" (343mm)	32.5" (826mm)	51.5" (1308mm)	55.5" (1410mm)	36" (914mm)
E2005	51" (1295mm)	23" (584mm)	32.5" (826mm)			55.5" (1410mm)	36" (914mm)
E2055	67" (1701mm)	16" (406mm)	25.5" (648mm)	48.5" (1232mm)		55.5" (1410mm)	36" (914mm)
E2555	78" (1980mm)	4" (102mm)	13.5" (343mm)	36.5" (927mm)	59.5" (1511mm)	55.5" (1410mm)	36" (914mm)
E2015	63" (1600mm)	16" (406mm)	25.5" (648mm)	48.5" (1232mm)		55.5" (1410mm)	36" (914mm)
E2115	70" (1777mm)	4" (102mm)	13.5" (343mm)	36.5" (927mm)	55.5" (1410mm)	55.5" (1410mm)	36" (914mm)
E2155	74" (1782mm)	4" (102mm)	13.5" (343mm)	36.5" (927mm)	59.5" (1511mm)	55.5" (1410mm)	36" (914mm)

Form#E2000 (03/23/12)