



Fajita Pan Warmer

Item: FPH12

Quantity: _____

Project: _____

Approval: _____

Date: _____

Fajita Pan Warmer

Models:

FPH12



*Model FPH12
(Shown with fajita pans supplied by
food service dealers)*

Standard Features:

- Stainless steel exterior
- Single valve control that adjusts 2 burners with a total input of 28,000 BTU(8.20 kWh) (natural and propane)
- Gas regulator
- 4" (102mm) stainless steel legs
- Reversible crumb tray; handle can be mounted so the tray can be either removed from the front or side enabling easy user access
- Pan rack holds up to 13 fajita pans at one time

Optional Features:

- Wall mounted stainless steel shelf, legs from the unit help secure into a locked position



Specifications:

Gas fajita pan heater model FPH12 with a total BTU rating of 28,000 with stainless steel exterior and rugged interior construction. Engineered to save broiler space and energy while improving safety by heating pans to their optimum temperature, eliminating the commonly used inefficient and unsafe use of a charbroiler to heat pans. Charbroilers heat pans to excessive heat while using valuable broiler cooking space. The fajita pan heater is easy to operate with a single valve control. The pans are uniformly lined up for ease of removal, and heat is spread more evenly to heat up to 13 pans at one time. Unit can be counter or wall mounted with the optional fajita pan heater wall mounting bracket.

Fajita Pan Heater on Wall Mounted Stainless Steel Shelf



Note: crumb tray handle can be installed on side or front for easy removal at either location

Garland Commercial
Industries, LLC
185 East South Street
Freeland, PA 18224
Phone: (570) 636-1000
Fax: (570) 636-3903

Garland Commercial Ranges Ltd
1177 Kamato Road,
Mississauga, Ontario
L4W 1X4 CANADA
Phone: 905-624-0260
Fax: 905-624-5669


Enodis UK LTD
Swallowfield Way,
Hayes, Middlesex
UB3 1DQ ENGLAND
Telephone: 081-561-0433
Fax: 081-848-0041

Enodis®


Gas Type	Total Input Rating	Operating Pressure*	Gas Connection
Natural Gas	28,000 BTU (8.20 kWh)	6" WC (15 mbar)	3/4" NPT
Propane Gas	28,000 BTU (8.20 kWh)	10" WC (25 mbar)	3/4" NPT

* Operating pressures shown are for installations up to 2,000 feet (610mm) above sea level. BTU input ratings must be derated for high altitude installations

Clearances				Shipping Wt Lbs/Kg
Installation From Combustibles		Entry		
Sides	Back	Crated	Uncrated	
6" (152mm)	6" (152mm)	13.5" (343mm)	12" (305mm)	64/29

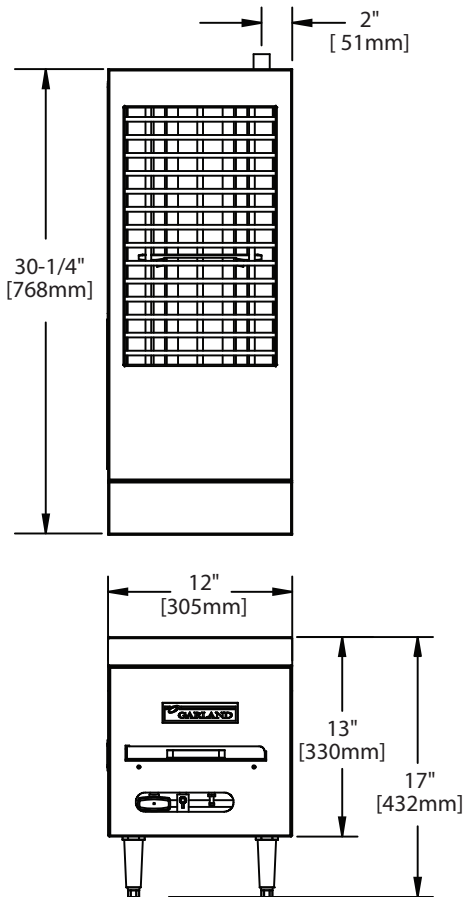

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

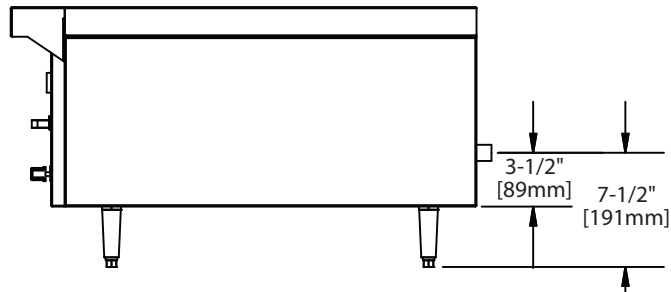

Form# FPH12 (06/07)