

FIGURE 2

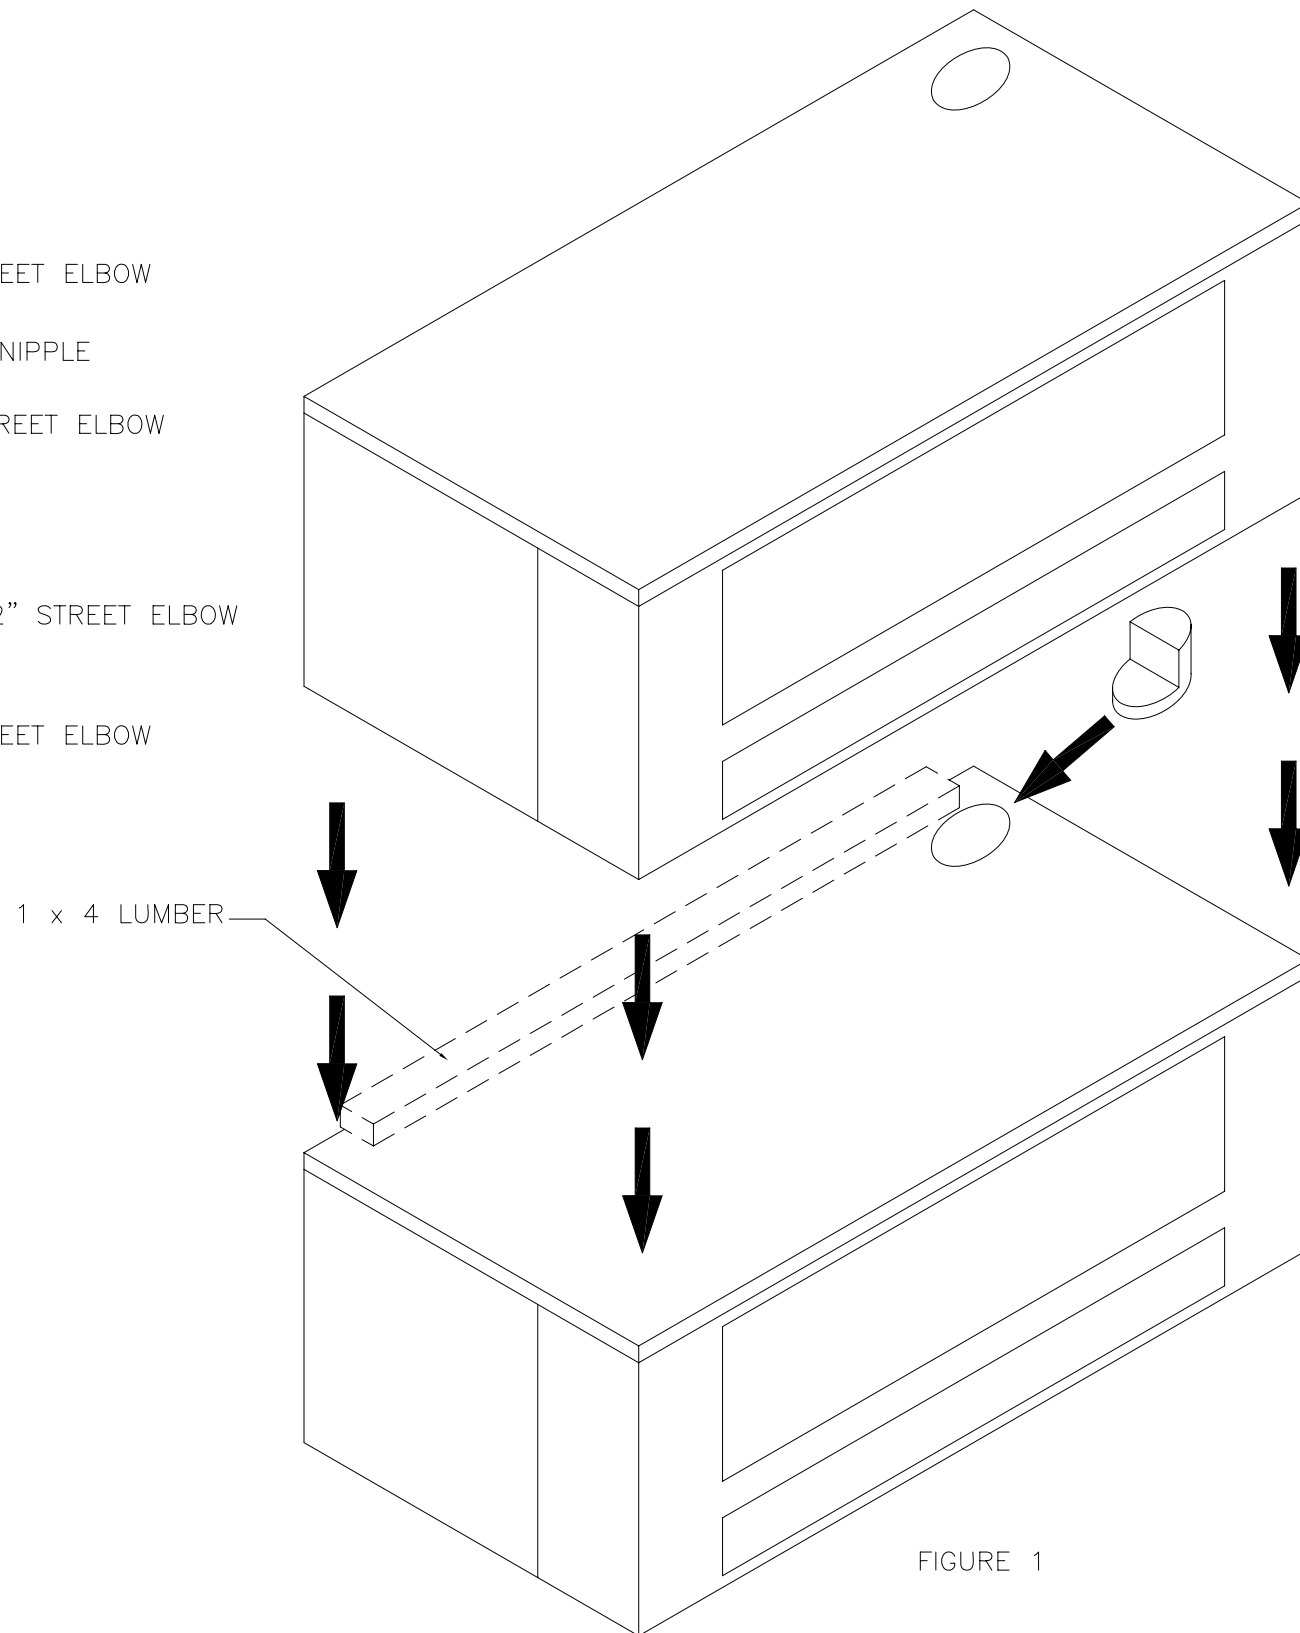


FIGURE 1

- NOTES: UNLESS OTHERWISE SPECIFIED
- 1 - REMOVE TOP TRIM PIECE FROM BOTTOM UNIT.
 - 2 - TIP UPPER UNIT BACKWARD. REMOVE FLUE PATCH AT LOWER REAR RIGHT OF UNIT, IF NOT ALREADY REMOVED.
 - 3 - PLACE 1" x 4" x 65" OR 77" LONG PIECE OF LUMBER ACROSS THE REAR TOP OF OVEN TO PREVENT FLUE CONNECTOR FROM MISALIGNMENT.
 - 4 - PLACE THE FLUE CONNECTOR ON LOWER UNIT WITH EXTENDED PART TO RIGHT SIDE OF UNIT (SEE FIGURE 1).
 - 5 - LOWER THE TOP OVEN OVER THE BOTTOM OVEN AND REMOVE THE LUMBER, ENSURING LOWER SECTION FLUE INSERTS INTO UPPER SECTION VENT HOLE.
 - 6 - CONNECT REAR STACKING PIPE ASSEMBLY TO UNITS. USE A PIPE THREAD COMPOUND THAT IS INTENDED FOR USE ON PROPANE GAS PIPING AND BE SURE TO CHECK FOR GAS LEAKS BEFORE FINALIZING THE INSTALLATION. (SEE FIGURE 2).
 - 7 - SEE OWNERS MANUAL FOR OTHER ASSEMBLY INSTRUCTIONS.

*** CAD PRODUCED DRAWING - DO NOT REVISE MANUALLY ***
 © 1999 GARLAND COMMERCIAL INDUSTRIES
 THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF GARLAND COMMERCIAL INDUSTRIES AND SHALL NOT BE COPIED OR REPRODUCED WITHOUT THEIR WRITTEN PERMISSION.

0	-	RELEASED ITEM/S 1	99-015	7/28/99	RJK	RK
REV	SYM	CHANGE DESCRIPTION	ECO	DATE	DR	APP

GARLAND A WELBILT Company	FREELAND PENNSYLVANIA 18224	SCALE FACTOR 10	SIZE B
-------------------------------------	-----------------------------------	--------------------	-----------

TOLERANCE (EXCEPT AS NOTED)

FRACTIONAL ±1/64 DECIMAL ±.005 ANGULAR ±1°

DESCRIPTION	DATE	DR. BY	DR. CK.	APP.
GPD48 & GPD60 DOUBLESTACK INSTRUCTIONS	7/28/99	RJK	RK	RK
	MODEL(S) GAS PIZZA	FILE NAME 19206S32		