


INSTRUCTIONS:

1. Remove shipping tape from oven doors, & combustion chamber door.
2. Open doors and remove (5) five screws that fasten combustion chamber front to unit. Three (3) on top and one (1) each side. Do Not discard screws.
3. Remove (2) two screws from front shipping clip to main bottom, and (1) large screw that fastens clip to skid. These items can be discarded. See below.



4. Install Front Combustion Chamber to unit with the (5) five screws.
5. Rear of unit is fastened to skid with (2) shipping angles and (4) screws left & right side these can be removed and discarded. See below.

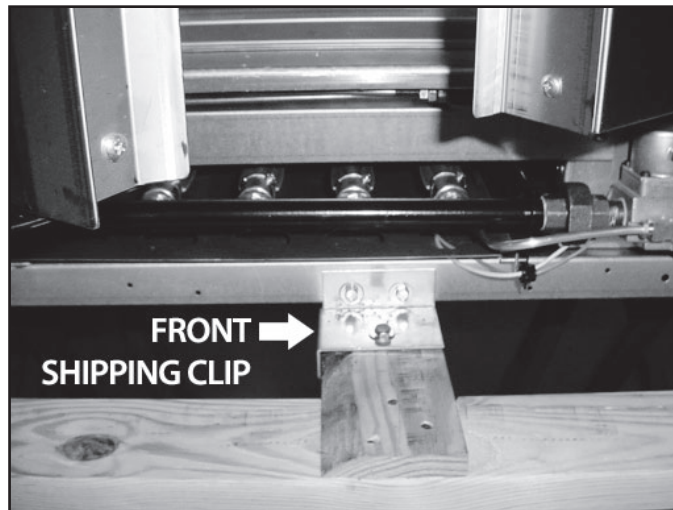

6. This completes the removal of shipping hardware from unit.
7. For units that have Main Back Enclosure on you will need to remove back that is fastened with screws.