

tem: 36ES21	
Quantity:	
Project:	
Approval:	
Date:	

Models:		
36ES21		
Electric 24" Wide, 70 Pound Capacity Fryer	 Standard Features: Stainless steel front and sides 20kW total element package 70 Lb. (31 kg) shortening capacity, continuously welded, heavy gauge nickel-plated steel fry tank with 1" (25mm) drain valve is located at the bottom Chrome wire basket Electromechanical thermo- stat with temperature control range of 200°F (93°C) to 375°F (190°C) Inconel immersion type fixed heating elements 6" (152mm) adjustable chrome plated legs (NSF) Storage cabinet with door 1 year warranty parts & labor (USA & Canada) 	 Optional Features: Stainless steel main back Stainless steel tank cover Extra fry tank Extra fry tank with 1" drain valve Set of twin baskets Large single basket 6" (152mm) adjustable stainless steel legs High voltage 460V 4 swivel casters complete with front brakes Marine accessories of hand rails, and deck fasteners NOTE: Fryers supplied with casters must be installed with an approved restraining device.

Specifications:

Heavy-duty range match fryer, 20 kW with 70 Lb. (31kg) shortening capacity. Heavy gauge, continuously welded nickel-plated fry tank. Utilizes four fixed immersion type inconel elements positioned to provide heat to the sides, back, front and bottom of the frying area. Stainless steel front and sides, mounted on storage cabinet complete with door. Fryers are available with casters or for dais mount. NOTE: The fryer may be paired together to form a common unit. They may be paired with a frymate model or may be set up as fry-stations of two fryers with a frymate unit between them. These fryers are designed to battery with 36E series heavy-duty ranges.




6 00

Garland Commercial Ranges Ltd. 1177 Kamato Road, Mississauga, Ontario L4W 1X4 CANADA

General Inquires 1-905-624-0260 USA Sales, Parts and Service 1-800-424-2411 Canadian Sales 1-888-442-7526 Canada or USA Parts/Service 1-800-427-6668





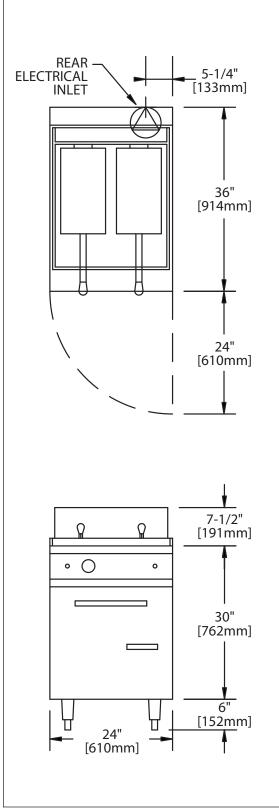


Nominal Ampers Per Line												
Model	1 Phase			Three Phase								
Model	208	40	60	208		240			460			
	50	57	46	X	Y	Z	X	Y	Ζ	X	Y	Ζ
36ES21	96	85	43	60	44	64	54	39	57	28	20	29

		Three Ph	er Phase	
Model	Total KW	208, 240, 460		
	N W	X-Y	Y-Z	X-Z
36ES21	20	4.8	5.6	9.6

Model	Shipping Information			
Model	Wt Lbs/Kg	Cu Ft		
36ES21	270/122	34		

Available Voltages: 208 VAC (197-219); 240 VAC (220-240); 460 VAC (440-480). When ordering specify voltage and phase.

Garland products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland will not provide service, warranty, maintenance or support of any kind other than in commercial applications.



Form# 36ES21 (08/17/11)

Garland Commercial Ranges Ltd. 1177 Kamato Road, Mississauga, Ontario L4W 1X4 CANADA General Inquires 1-905-624-0260 USA Sales, Parts and Service 1-800-424-2411 Canadian Sales 1-888-442-7526 Canada or USA Parts/Service 1-800-427-6668

